

## PRM EP-PLINTH MORTAR

08/06/2012

### DESCRIPTION

PRM EP-PLINTH MORTAR is a solvent-free, 3-component, extremely fine skirting board and repair mortar which does not stick to the track. The normal packaging for PRM EP-PLINTH MORTAR is a set of 11kg.

### POSSIBILITIES

#### SKIRTING BOARDS

Due to its extremely fine structure, the Sidec PRM EP-PLINTH MORTAR can reach 'zero', making it highly suitable for creating both straight and hollow corner skirting boards for casting floors, gritted floors etc. PRM EP-PLINTH MORTAR can be very easily repainted in 1 coat. The result is a seamless connection between floor and wall.

#### PROPORTIONS

The Sidec PRM EP-PLINTH MORTAR can also be used for repairing small and deep holes in concrete floors.

### COLOURS

The standard colour of Sidec PRM EP-PLINTH MORTAR is beige/grey, but most RAL colours are available upon request.

### CONDITIONS

#### INSTALLATION INSTRUCTIONS

The substrate must be sufficiently strong, grease- and moisture-free!

Mix the A and B component of the resin using a drill and mixing spatula until obtaining a homogenous mixture. Use a brush to apply some of it to the skirting board or in the hole to be repaired in the concrete. Add the rest of the mixture to the sand mixture and mix until obtaining a homogenous mixture. Subsequently, use a skimmer to apply the mortar to the skirting board or in the hole. After 12 hours the Sidec PRM EP-PLINTH MORTAR can, if necessary, be repainted with an epoxy coating or epoxy gel.

Attention: always work 'wet' in 'wet'!

### VERTICAL SKIRTING OR WALLS

SIDEC's PRM EP-PLINTH MORTAR is suitable for the installation of vertical skirting or walls of 3mm thickness. First, mix PRM EP-PLINTH MORTAR A+B together and apply vertically as a first coating. On top, spread out a mixture of 9% PRM EP-PLINTH MORTAR A+B with the added C component.

For thicker vertical coatings (up to 10mm), PRM EP-PLINTH MORTAR A+B should be replaced with EPG A+B. In this case, use the EPG A+B as a base coat, before applying the mixture of 9% EPG A+B with PRM EP-PLINTH MORTAR C.

For vertical applications with EPG A+B, SIDEC offers PRM EP-PLINTH MORTAR C in 25kg bags.






**PRM EP-PLINTH MORTAR**

08/06/2012

**USAGE**

Straight corner skirting boards: 1 kg for 7,5 metre

Hollow corner skirting boards:

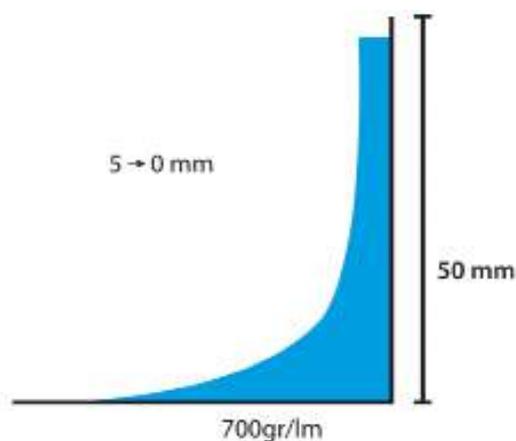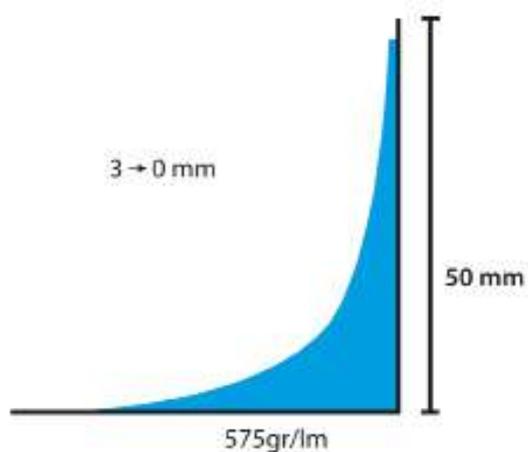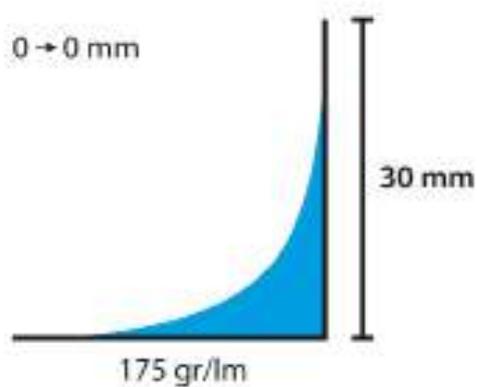

**SAFETY**

Read always the material safety datasheet of the product.

